
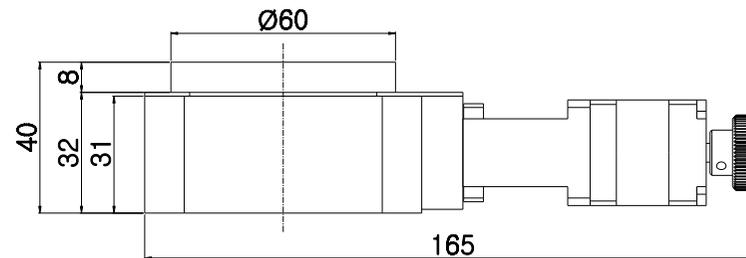
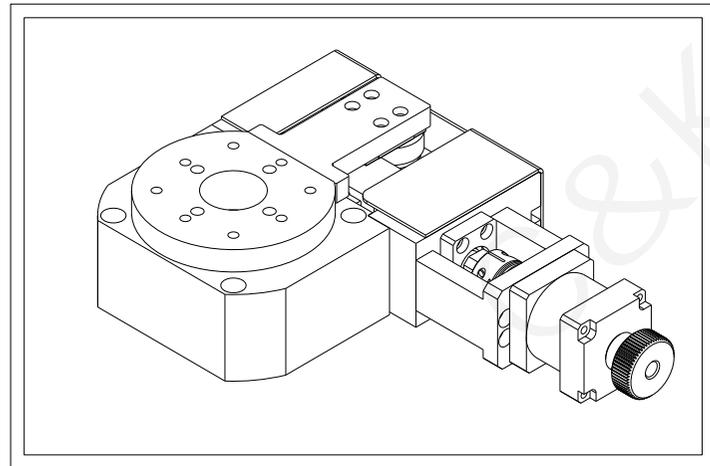
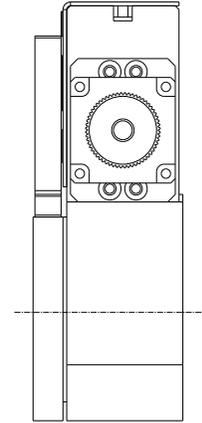


6	5	4	3	2	1
Model	JMR - 60L				
Surface Size	Ø60				
Travel Range	±5°				
Travel Guide	Thrust & Ball Bearing, Linerar Guide				
Resolution	2µm(Full step)				
Max. Speed	8.2°/sec (based on lead 1 ball screw)				
Moving Distance /1 rotation	0.87°				
Applicable Ball Screw	Ø8, lead 1(C5/C7)				
Accuracy	0.01° (C5)/0.02° (C7)				
Bi-Repeatability	±0.0015°(C5) / ±0.003°(C7)				
Load Capacity	5 Kgf				
Parallelism	30µm				
Driving Parallelism	15µm				
Staightness	10µm				
Weight	1.6Kg				
Material	Aluminum				
Finish Treatment	Black Anodizing				

Email : sales01@dck-gd.com

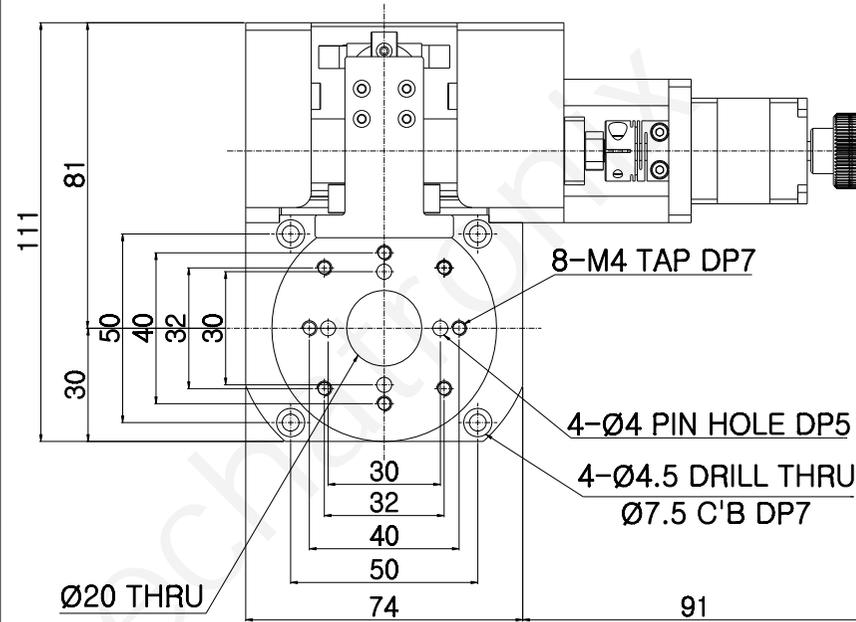

JMR - 60L

东莞市诚鲲五金电子科技有限公司