
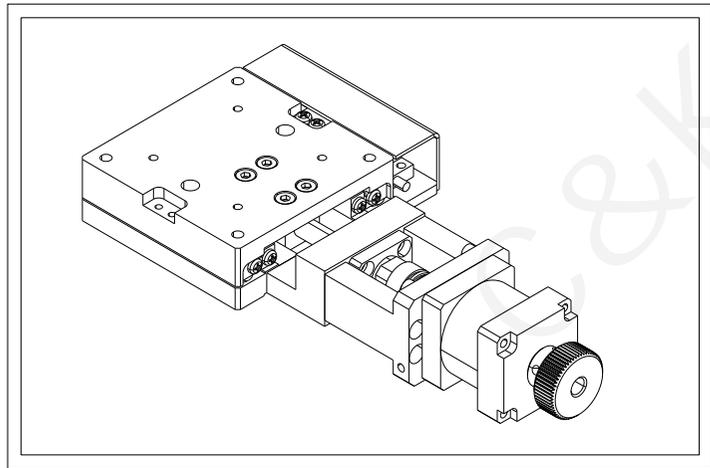
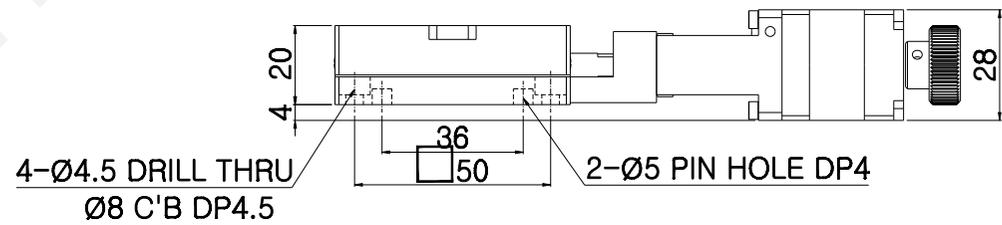


6	5	4
Model	JMSX-60R	
Surface Size	60 x 60mm	
Travel Range	20mm	
Travel Guide	Linear guide	
Resolution	2 μ m (Full step)	
Max. Speed	10mm/sec (based on 5phase motor)	
Applicable Ball Screw	\varnothing 6, lead 1 (C5/C7)	
Accuracy	7 μ m(C5) / 12 μ m(C7)	
Bi-Repeatability	\pm 1.5 μ m(C5) / \pm 3 μ m(C7)	
Load Capacity	10 Kgf	
Parallelism	20 μ m	
Driving Parallelism	10 μ m	
Staightness	5 μ m	
Weight	0.7Kg	
Material	Steel	
Finish Treatment	Electroless Nickel Plating	

Email : sales01@dck-gd.com

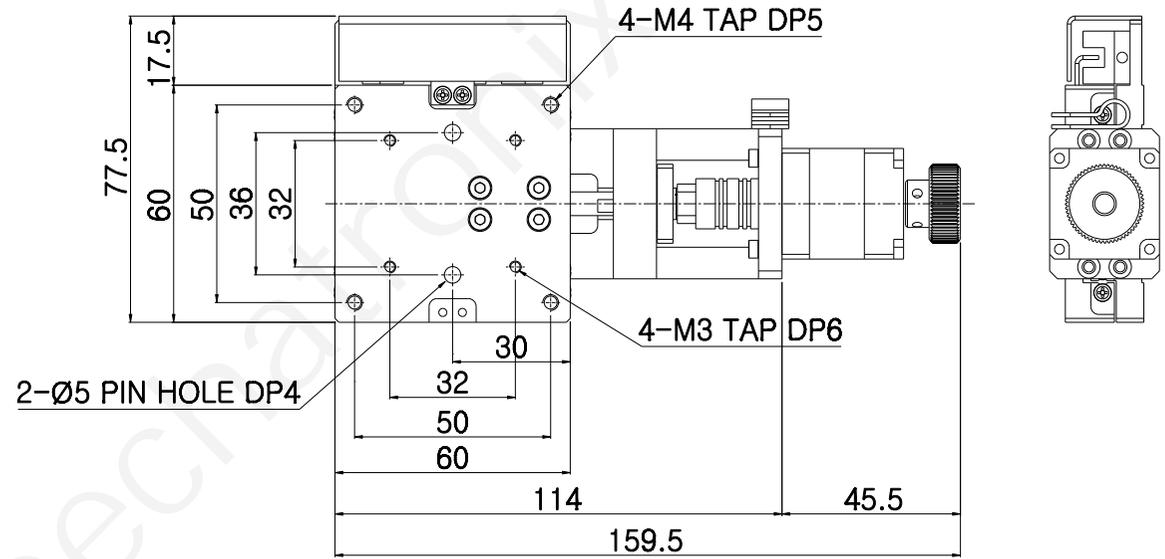

JMSX - 60R

东莞市诚鲲五金电子科技有限公司