
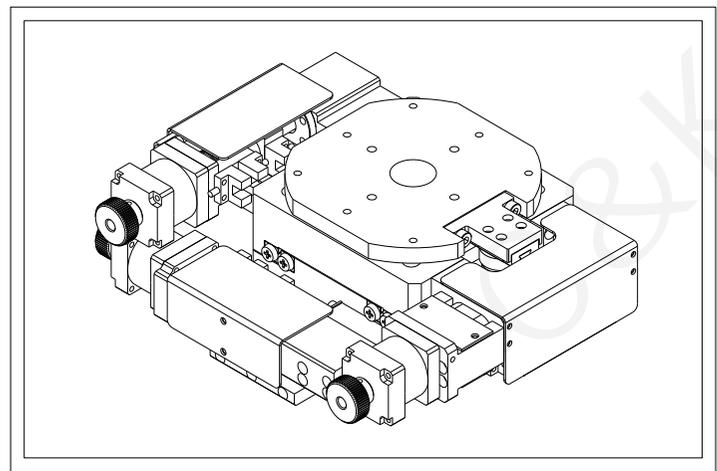
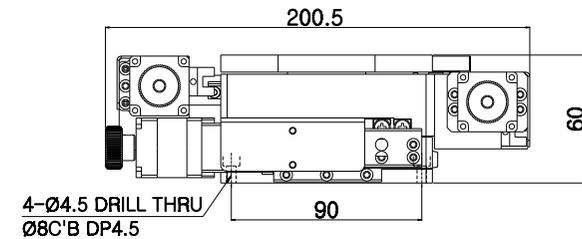
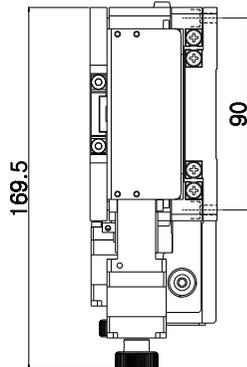


6	5	4	3	2	1
<b>Model</b>	<b>JMU-100</b>				
<b>Surface Size</b>	<b>100 x 100mm</b>				
<b>Travel Range</b>	<b>±10/ ±10 / ±5°</b>				
<b>Travel Guide</b>	<b>Crossed-Roller guide , Cross Roller ring</b>				
<b>Resolution</b>	<b>2<math>\mu</math>m (Full step)</b>				
<b>Max. Speed</b>	<b>10mm/sec (based on 5phase motor)</b>				
<b>Applicable Ball Screw</b>	<b>Ø8, lead 1 (C5/C7)</b>				
<b>Accuracy</b>	<b>7<math>\mu</math>m(C5) / 12<math>\mu</math>m(C7)</b>				
<b>Bi-Repeatability</b>	<b>±2<math>\mu</math>m(C5) / ±3<math>\mu</math>m(C7)</b>				
<b>Load Capacity</b>	<b>10 Kgf</b>				
<b>Parallelism</b>	<b>40<math>\mu</math>m</b>				
<b>Driving Parallelism</b>	<b>20<math>\mu</math>m</b>				
<b>Staightness</b>	<b>10<math>\mu</math>m</b>				
<b>Weight</b>	<b>3.5 Kg</b>				
<b>Material</b>	<b>Aluminum</b>				
<b>Finish Treatment</b>	<b>Black Anodizing</b>				

Email : sales01@dck-gd.com

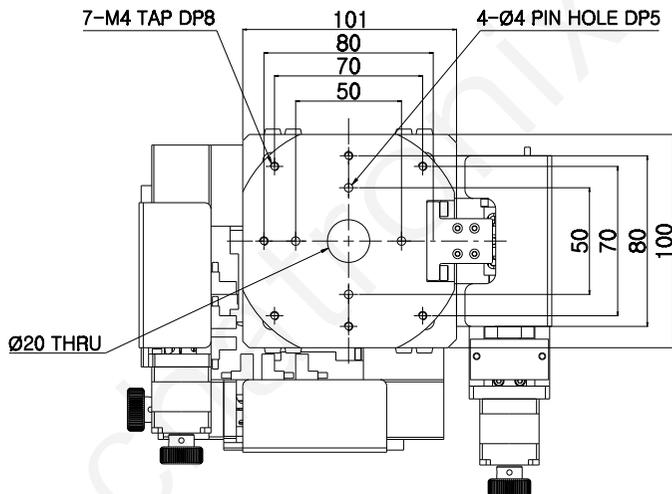

**JMU - 100**

东莞市诚鲲五金电子科技有限公司